

FLEXFEED SP 300-400



MANUAL FEEDING MACHINE FOR ALL TYPES OF ITEM SIZES

APPLICATIONS

Our feeding machines follow the same principles as all other Foltex machines "Designed for safety and simplicity".

The FlexFeed SP300 - 400 is a manual vacuum table feeding machine for processing all sizes of item.

The FlexFeed SP 300 - 400 is suitable for all flatwork ironers.

Its versatility means it can operate from 1 to 6 lines. The FlexFeed SP300 - 400 is a robust machine that requires minimal maintenance.


Its unbeatable quality and high production rates put it ahead of its competitors.

OPERATION

Items are placed on the seam side on top of the feed-in belts, so that the rest of the item is automatically fed into the clamping drawer by means of the powerful suction motors. The suction power of the motors as well as the feed-in speed can be adjusted according to the item being processed. The LED light-laser guides enable operators to insert items accurately even at high speeds.

The drive for the feed-in belts is done using a single motor and a flat belt. A variable friction system allows the feed-in belts to be stopped for operator safety. It is also important to note that the side cover panels end right at the belts.

This is why the FlexFeed is the safest machine on the market.

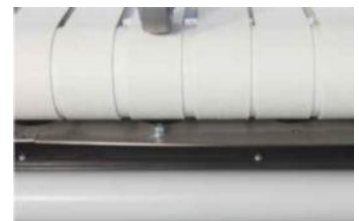

FLEXFEED SP 300-400

MANUAL FEEDING MACHINE FOR ALL TYPES OF ITEM SIZES

FEATURES

- Working width: 3000, 3300 and 4000 mm.
- Option of placing a clothes trolley under the feed-in table; this speeds up work rates and increases productivity.
- The FlexFeed sits on guide wheels, so that the machine can be moved as required.
- The filter bags can be located at the top side or at the rear of the machine.
- The suction box is fitted with easy-access hinged panels.
- Synchronisation with the flatwork ironer is done automatically via a frequency shifter.



TECHNICAL DETAILS

Power	3x380/415V,50/60Hz, 3ph
Power (b)	3x280/240V,50/60Hz, 3ph
Power	3x480V, 60Hz, 3ph
Power consumption	2.0 kWh
No. of lines	Max. 7
Max. item length	400 cm
Max. item width	3000,3300,3500,4000 mm
Machine length	129 cm
Machine width	375 - 495 cm
Machine height	143 cm
Machine weight	1100 kg